

HT-825b

**Magnetic** Bluetooth Wireless


iToudai Beacon

### / Feature

- 30% more battery life, more durable, more power-saving! The Bluetooth signal is more stable!
- Scheduled timer for daily operating time . (Power saving)
- Encrypted signal. High security and privacy . (Optional)
- Built-in powerful magnet can be adhered to the metal surface, which is convenient for the detector to be fixed.
- Designed and manufactured in Taiwan. Quality assurance.

### / Application


Ideal for use in clean room manufacturing, semiconductor industry, biotechnology industry, hospital and pharmaceutical storage environments, greenhouse plant cultivation environments, computer server rooms, warehouse logistics management, convenience store retailers ... and more.

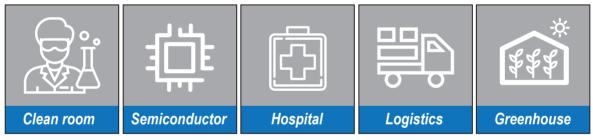

X This product is not a medical device and is for reference only.

# / Specification

#### **Appearance Dimensions / Structure Drawing**

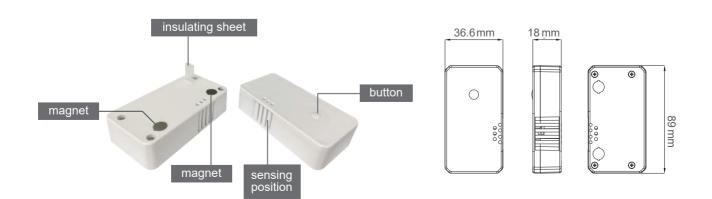



#### **Specification**

| Item model                     | Beacon Type HT-825b           |
|--------------------------------|-------------------------------|
| Size and weight                | 67 x 37 x 18mm / 40g          |
| BLE bluetooth version          | BLE4.1 Low Energy             |
| Bluetooth maximum output power | 5dBm                          |
| Bluetooth sensitivity          | -97dBm                        |
| Bluetooth antenna              | pcb antenna                   |
| Bluetooth technology           | 2,402-2,480 MHz               |
| Working power supply voltage   | 2.3~3.0V                      |
| Battery supply                 | AAA x 2pcs (Alkaline Battery) |
| Format switching options       | iToudai / iBeacon             |
| Other main functions           | SOS Button (Optional)         |
| Operating temperature          | 0°C~60°C                      |
| Storage temperature            | -25°C~65°C                    |


## APP Setting Tool / iToudai Tool-825

| Enter Password → Access Settings Mode |

Assist engineers/management personnel in adjusting Beacon identification codes, signal strength, and transmission frequencies.

#### **Basic Functions**

- 1) Interpretation of Beacon signal strength and distance.
- 2) Reading of Beacon battery level.
- **3)** Signal reception filter, allowing control over which Beacon signals to receive.
- 4) Cloud data transmission and reception.
- 5) Direct configuration of Beacon UID, Major, Minor.
- 6) Setting of signal interval time and power strength.
- 7) Display and alert for Beacon battery status.
- 8) Scheduling of timed events and switch settings.
- 9) Setting of vibration wake-up time and switch.

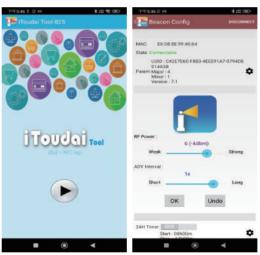



# iToudai Receiver Spec Sheet / Receiver Specifications

| Specifications / Size            | LAN-M-0462 Beacon Medium LAN Receiver      | USB-0462<br>Beacon USB Receiver       |
|----------------------------------|--|---------------------------------------|
| photo                            |  | H                                     |
| Working power supply             | POE / 9VDC                                 | USB 5V                                |
| LED indicator                    | Yes  | Yes                                   |
| Received distance (conservative) | 25m  | 25m                                   |
| Alarm indicator                  | No   | No                                    |
| Physical dimension               | Ø100/ D50(mm)                              | W74.3 / H30 / D12 (mm)                |
| Weight                           | 108g                                       | 14g                                   |
| Waterproof                       | No   | No                                    |
| With alarm buzzer                | No   | No                                    |
| Use of the occasion / use        | Classroom, lecture hall, attendance system | Plug and play, cloth with flexibility |

| iToudai<br>Tool Features         | HT-825b                          |
|----------------------------------|----------------------------------|
| For Android mobile               | Android version 5+               |
| Adjustable RF power              | Yes (with 13 levels of strength) |
| Timer scheduling function        | Daily operating time schedule    |
| Transmission<br>distance         | 10~60m                           |
| Password setting                 | Yes                              |
| Adjustable advertisment interval | Yes                              |

