




CANNEX TECHNOLOGY INC.



## Wireless Temperature & Humidity Monitoring System

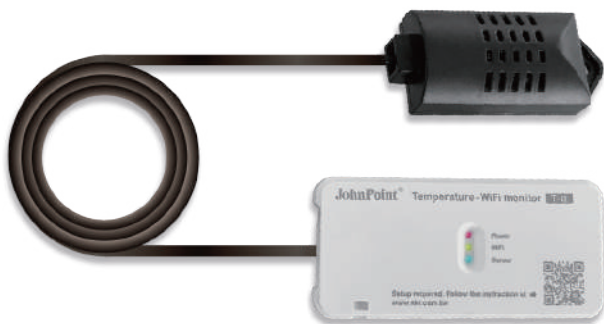

### Temperature Monitor HT-α

HT-α is an innovative system for real-time monitoring and alarming of temperature and humidity. It offers a practical solution specifically designed to meet strict regulatory compliance requirements for hospitals, life sciences, and other industries where environmental monitoring is crucial.

WiFi connection, plug-and-play



#### Features >>

- All-in-one temperature and humidity sensor.
- Mobile app for 24/7 real-time data monitoring and alert if temperatures or humidity go outside their optimal range.
- Automated historical and alarm reports are saved.
- WiFi connection.
- Easy installation. Plug-and-play, no extra wiring.
- Cost-effective.



#### Application >>

- Cleanroom, Storage facility, Greenhouse monitoring.
- Hospital & clinics : Vaccine, blood serum storage equipment.
- Biotech and pharmaceutical industry : Laboratory storage facility, cold-chain systems.
- Food & Beverage Manufacturing, Distribution.

**Ideal for indoor temperature and humidity monitoring.**

#### Advantage >>



**Convenient**  
Remote monitoring



**Management**  
Reduce manpower



**Immediate**  
24/7 real-time alert



**Reliable**  
Temperature & humidity sensor



**Risk**  
Avoid financial losses



**Simple**  
Ready to use in existing freezer and refrigerator

• Sensor should be installed in a place where the temperature and humidity are relatively stable and can best represent the measure ambient temperature and humidity.

※ Note : In a stable temperature and humidity environment, it takes 120 seconds for the sensor to reach actual figure.

• Do NOT install HT-α in an environment where :  
1. temperature and humidity change dramatically,  
2. air circulation is violently or not circular at all,  
3. contains salt spray or corrosive gas.

## Mobile APP




When temperature/humidity values are outside of normal range or HT-α's connection is broken/unstable, mobile app will alert the situation immediately.



## Cloud-based stats and charts



Temperature and humidity

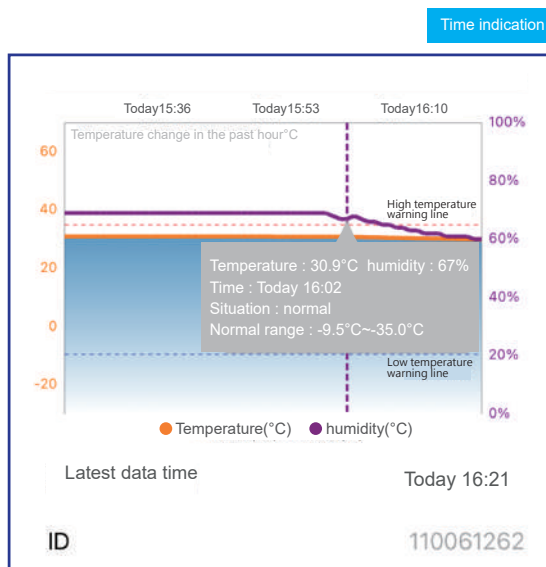

## Specification



- WiFi access point is required on site for Internet communication.
- Customized application system are available. Please contact us for further information.

© All related software and hardware products of this system are developed, produced, sold and after-sales service by our company. Avoid information security problems and risks.

Model	Temperature monitor WiFi Gateway (HT-α)
Signal indication	<ul style="list-style-type: none"> <li>• Red LED (POWER LED) : Stays on when power is on (MCU is operating normally).</li> <li>• Green LED (WiFi LED) : Stays on when connected to WiFi AP, otherwise blinks.</li> <li>• Blue LED (TCP LED) : Stays on when connected to the server, otherwise blinks.</li> </ul>
Working power	micro USB 5V (< 2W)
LED indicator	R.G.B x 1 each
Receiving distance (conservative value)	25m
Transmission method	WiFi wireless
External dimensions	H75 / W35 / D11 (mm)
Weight	45g
Waterproof	None (Not for outdoor use)
Other accessories	85~220vAC adpater / USB 5v 1A x 1 micro USB cable x 1
Occasion / Purpose	Can be intalled in freezer, refrigerator or other storage equipment.
Installing method	Hook and loop fastener for easy fix and remove.
Temperature detecting range	Sensor spec. <ul style="list-style-type: none"> <li>• Operating Temperature range : -40°C to 85°C</li> <li>• Relative humidity range : 0% to 100%</li> <li>• Humidity accuracy : ±2% (typical), ±3% (maximum)</li> <li>• Temperature accuracy : ±0.2°C (typical), ±0.4°C (maximum)</li> <li>• size : 60×27×16 (mm) · cable length 1.5M (Optional : 3, 5M)</li> <li>• size : Ø10×70 (mm) · cable length 1.5M (Optional : 3, 5M)</li> </ul>



CANNEX TECHNOLOGY INC.

Since 1991  
Design and manufacture  
/ Made in Taiwan

http://www.akr.com.tw  
Tel: +886-4-861-3883(Rep) Fax: +886-4882-8209  
Add: No.182, Sec.2, Yuanlu Rd., Sihu, Changhua,  
51449, Taiwan

Copyright © 2021.04 Cannex Technology, Inc. All rights reserved.